



Apply general thread lock.  
Tighten screw and apply  
thread lock.

一般型止鬆劑  
鎖緊螺絲並確認上膠

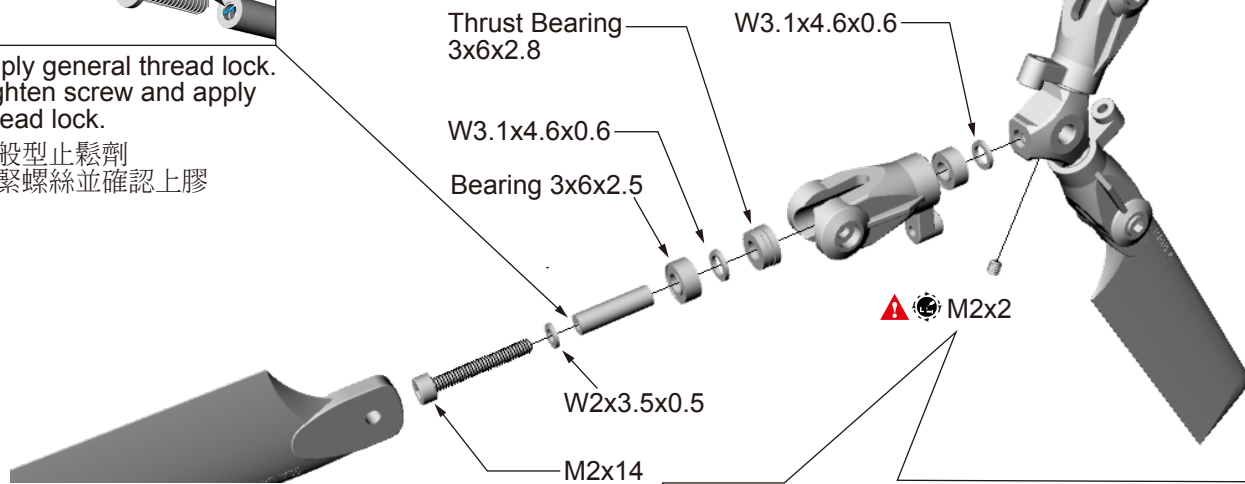

若六角扳手有磨損的情況下，可使用M2x4半圓頭螺絲  
The M2x2 socket set screw can be replace by M2x4 socket head button screw if the Hexagon Wrench is frayed.



Apply general thread lock.  
一般型止鬆劑



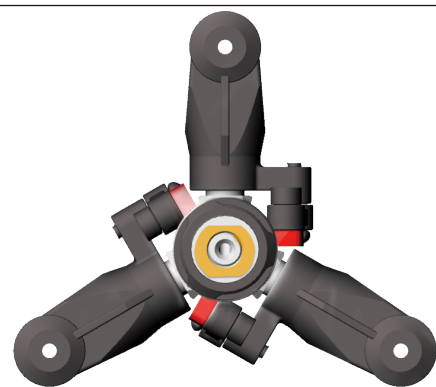


示意圖  
illustration

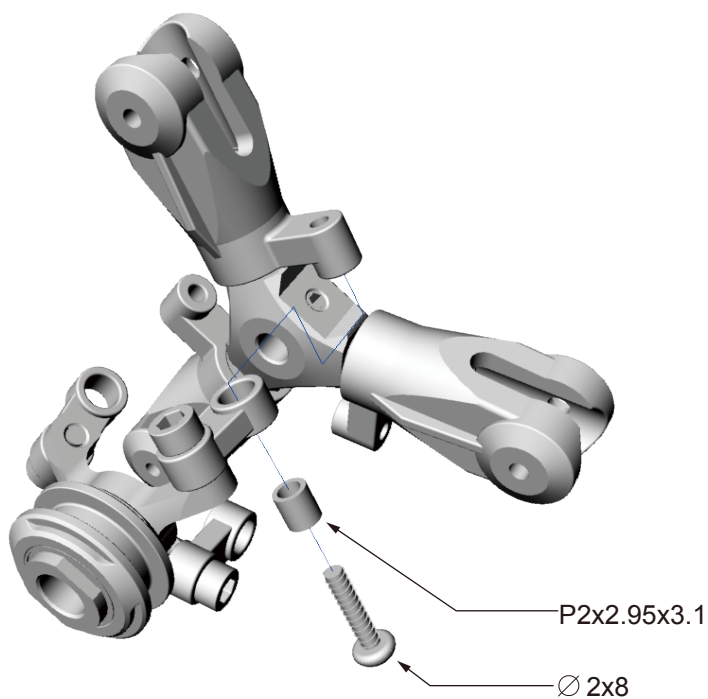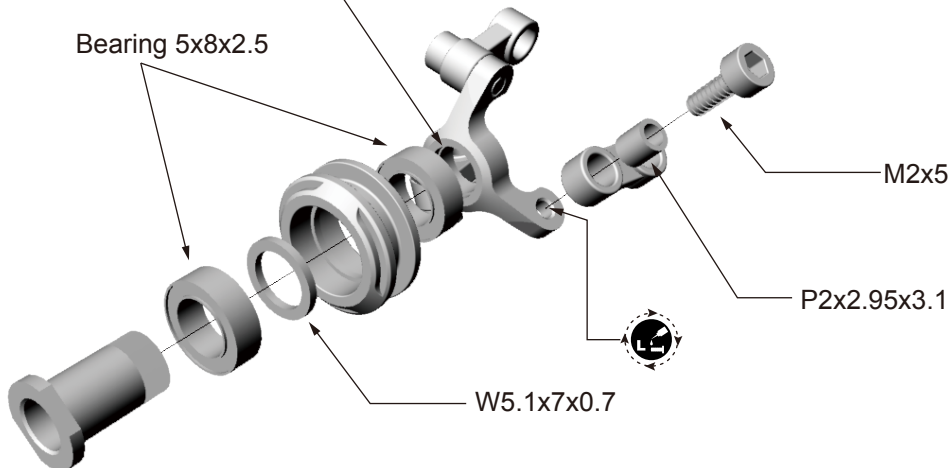