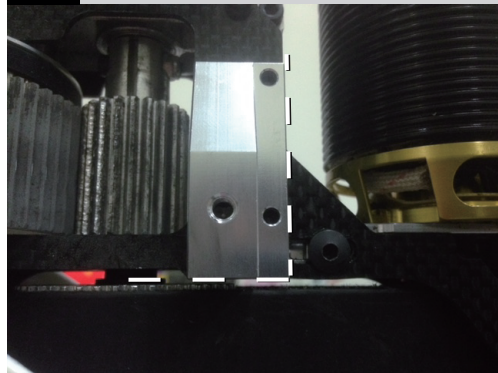
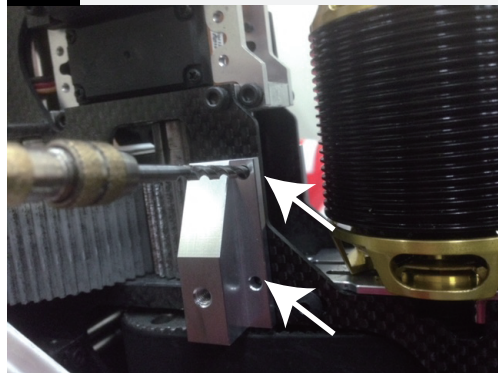


1


請將腳架固定座切齊側板如虛線所示，
置於機身側板上。
(照片以單邊示意，另一邊用同樣方式操作)

please secure the landing gear mount
and make sure that it is lined up like the picture.
(Please repeat procedure for the opposite side)

2


並使用 $\varnothing 3$ 鑽頭，小心貫穿側板(箭頭處)
(照片以單邊示意，另一邊用同樣方式操作)

Please use a $\varnothing 3$ drill head, carefully
and slowly drill through the side plate.
(Please repeat procedure for the opposite side)

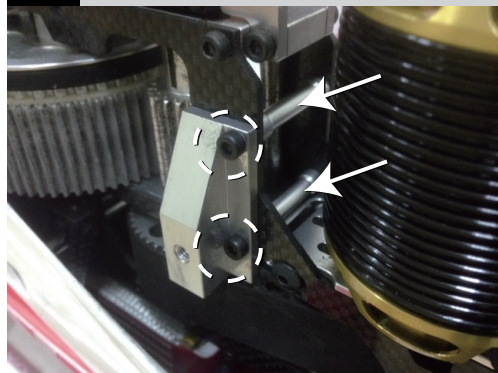3

將27mm 鋁柱放入側板內，並把M3x10 螺絲
鎖緊(照片以單邊示意，另一邊用同樣方式操作)

place the 27mm aluminium part into the side plate
and secure with M3x10 screws.
(Please repeat procedure for the opposite side)

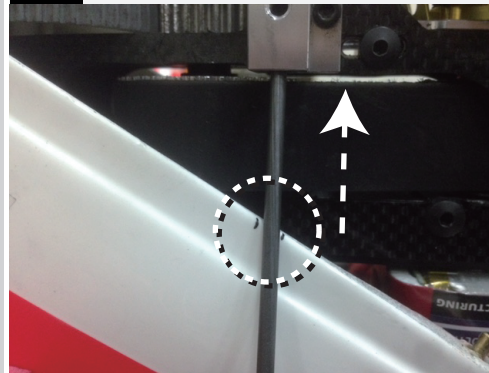4

將腳架插入固定座，並做好記號
(照片以單邊示意，另一邊用同樣方式操作)

Install the landing gear onto the mount
and make a mark.
(Please repeat procedure for the opposite side)

5

研磨有干涉的位置
註：研磨完成後將腳架插入固定座並鎖上M4x4
(照片以單邊示意，另一邊用同樣方式操作)

please grind away parts that will cause
interference.
(After you finish grinding away the parts
please install and secure the landing gear
with the mount onto the product using the M4x4
screws.)

6

完成圖
Complete product